

Acetabulum Load Cell

Type M52811A...

Uniaxial

Type M52811A... is designed to measure force in the acetabulum of the crash test dummy SID-IIs (S2).

- Uniaxial (F_y)
- UPS module integrable
- Low linearity errors and hysteresis errors
- Kistler system cabling
- Polarities according to SAE J211/1

Description


The load cell is based on the principle of a tensile/compression bar. In order to reduce cross impacts, the tensile bar is divided into four bars with equivalent cross section.

The induced force creates a mechanical stretching respectively buckling in the body. The resistance changes, which are proportional to the force, are measured by means of strain gage, designed as full bridge circuit.

The load cell is available with UPS module which is integrated in an external housing in the wiring or in the connector. Customized cable lengths and connectors with specific pin assignments are optionally available.

Application

The load cell is directly assembled at the designated location in the dummy and provides important information about the loads on the human body occurring during a crash test.



Technical Data

Measuring range	kN	8,9
Current consumption, at 10 V	mA/channel	20
Sensitivity	$\mu\text{V}/\text{V}/\text{kN}$	108
Bridge resistance	Ω	540
Zero meas. output (ZMO), typ. / max.	mV/V	0,01 / 0,03
Supply voltage ¹⁾	VDC	2,5 ... 15
Insulation resistance ²⁾	G Ω	>10
Operating temperature range	$^{\circ}\text{C}$	-20 ... 80
Storage temperature range	$^{\circ}\text{C}$	-30 ... 90
Amplitude non-linearity	%	<1
Hysteresis	%	<1
Weight (without cable)	grams	131

All specifications are typical at 25 ° C and rated at 10 V sensor supply voltage, unless otherwise specified.

¹⁾ With UPS module 9 ... 12 VDC

²⁾ All wires to sensor housing, measured with 500 V (DC)

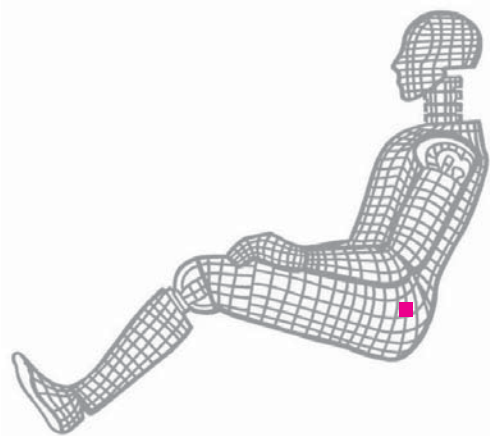


Fig. 1: Dummy application, location acetabulum

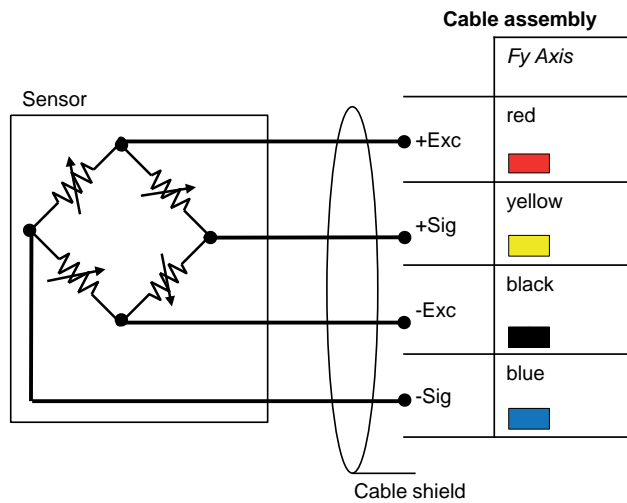


Fig. 2: Cable assembly

Included Accessories

- None

Optional Accessories

- Add. label with serial number, plug side
- UPS module
- Add. label with ID number at sensor
- Add. shunt

Type No.

M015KABID
on request
M015KABID
on request

Type M52811A

Design

Standard	EM
----------	----

Cable Length before Electronics

0 cm	00
<10 cm (digit x 1 cm)	C#
10 cm ... 9,9 m (digit x 10 cm)	##
10 m ... 90 m (digit x 10 m)	D#

Additional Electronics

Sensor detail, as per type declaration force-moment TP-650-2	#
--	---

Cable Length after Electronics

0 cm	00
<10 cm (digit x 1 cm)	C#
10 cm ... 9,9 m (digit x 10 cm)	##
10 m ... 90 m (digit x 10 m)	D#

Connector

Conn. type, as per TP-600	#-
Conn. assignment, as per TP-600	-#

M52811A_000-792e-11.15

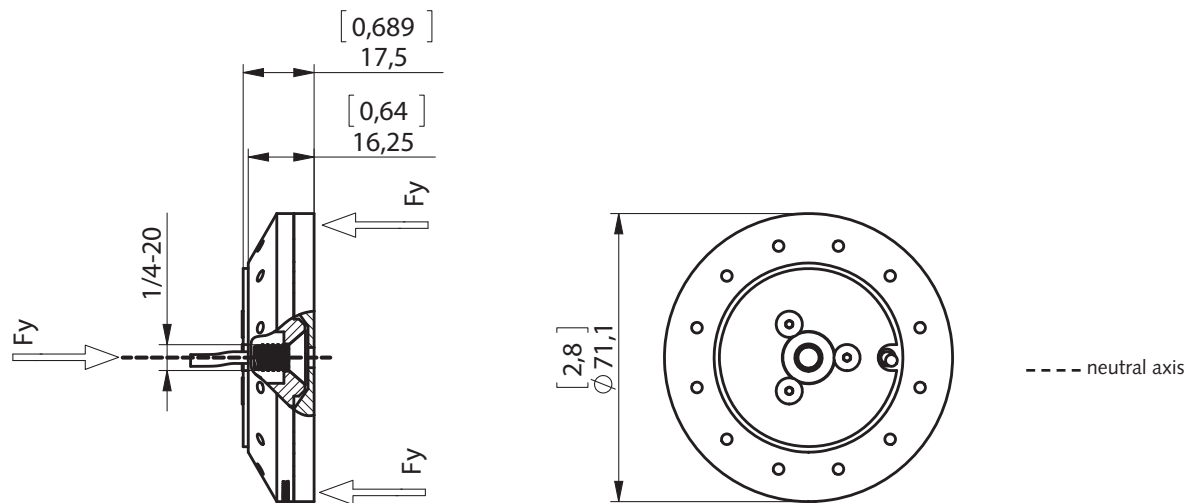


Fig. 3: Dimensions